

! DTD!

DTD

Delta Electronics
DTD

(14)

13

DTD,

()

DTD

2007






!


DTD!

1. : 48 48 (1/16 DIN) 48 96 (1/8 DIN)
2. : , / , ,
3. : (K, J, T, E, N, R, S, B, L, U, T_{xk}),
(Pt100, JPt100), (0 ~ 5V, 0 ~ 10V, 0 ~ 20mA, 4 ~ 20mA, 0 ~ 50mV)
4. 8 Alarm-
5. EEPROM 4 (1 .). 10
- 6.
7. (IP66)

DTD 4848

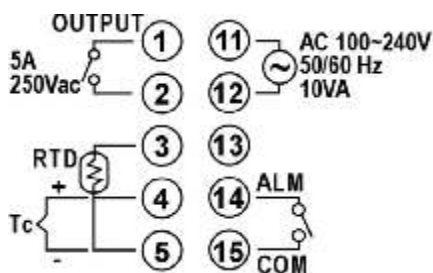

DTD4896

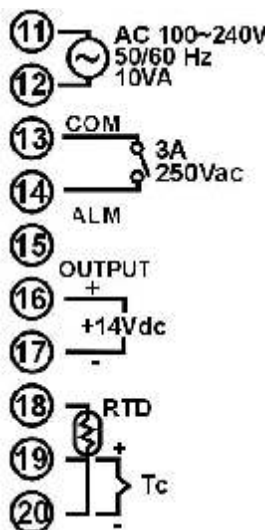



!

DTD!

	AC 100 ~ 240V (-15% ~ +10%), 50/60Hz
	85% ~ 110%
	5VA
	7- : . . -
	: K, J, T, E, N, R, S, B, L, U, Txk
	; JPt100 Pt100
	: 0 ~ 5V, 0 ~ 10V, 0 ~ 20mA, 4 ~ 20mA, 0 ~ 50mV
	, , , (1 8)
	: 250V, 5A
	: DC14V, . 40mA
	1 - : 250V, 3A
	0 1 ()
	: 0.4
	: 0.4
	10 ~ 55Hz 10m/s ² 10 .
	M . 300m/s ² 3 , 6
	0°C ~ +50°C
	-20°C ~ +65°C
	2000
	35% ~85% RH ()



!

DTD!

DTA/DTB/DTD

	DTA	DTB	DTD
	AC100 ~ 240 V	AC100 ~ 240V	AC100 ~ 240V
	48 x 48 72 x 72 48 x 96 96 x 96	48 x 24 48 x 48 48 x 96 96 x 96	48 x 48 48 x 96
	TC/RTD	TC/RTD/	TC/RTD/
	500	400/150	400
	2%	2%	5%
	1	2	1
	, / ,	, / , (8 8)	, / , (1 8)
	2	3	1
	4	4	3
COM-	(RS-485)	(RS-485)	
	CE,UL,C-UL	CE,UL,C-UL	CE

!

DTD!

:

DTD

①

②

③

①	DTD:	DELTA	D
②	4848: 48 48		
()	4896: 48 96		
③	R: : 250V, 5A		
	V: . : DC14V +10%~ -20%		

? : CE

: 2007

:

DTD 4848

DTD 4896

